




MIKE-O-CUT LV

DESCRIPTION


MIKE-O-CUT LV is a light viscosity heavy duty drilling and tapping fluid. It does not contain 1,1,1 trichloroethane. MIKE-O-CUT LV is ideal for use in a recirculating tapping fluid system and it can also be added to cutting oils to increase E.P. and Lubricity properties. This tapping and drilling fluid will not contaminate the coolant in the machine sump. It floats on the surface of the coolant for easy skimming. Ideal for tapping and drilling stainless steel, carbon steel, inconel, monel, hastalloy, titanium, aluminum and other alloys and exotics.

ADVANTAGES

- * INCREASES PRODUCTIVITY
- * GREATLY EXTENDS TAP AND DRILL LIFE
- * REDUCES TORQUE
- * IMPROVES FINISH AND SIZE
- * WILL NOT CONTAMINATE COOLANT
- * DOES NOT CONTAIN 1,1,1 TRICHLOROETHANE

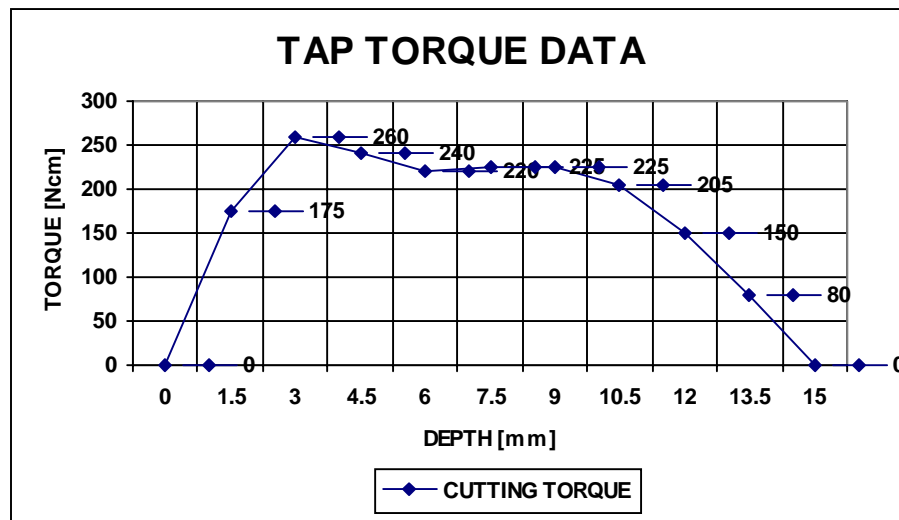

TAPPING TORQUE TEST: Measures the metal removal efficiency of metalworking fluids.

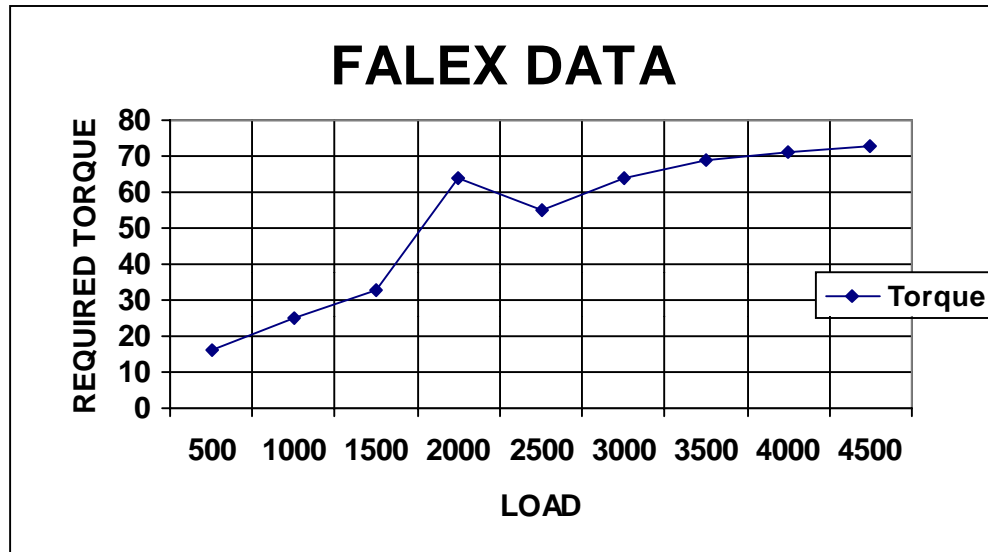

FALEX EP/WEAR TEST: Measures the load carrying capacity of metal-working fluids. The less torque required the greater the load carrying capacity.

PHYSICAL PROPERTIES

VISCOSITY..... + 200 SUS @ 100°F
 APPEARANCE..... AMBER TRANSPARENT OIL
 FLASH POINT..... >300°F
 CHLORINATED SOLVENTS..... NONE

AVAILABILITY

4 OZ..... 24/CASE
 16 OZ. 12/CASE
 1 GALLON ... 4/CASE
 5 GALLON... PAIL
 55 GALLON.. DRUM